


HFS15T Series Flange Spreader



CanTorque Inc.
www.cantorque.com

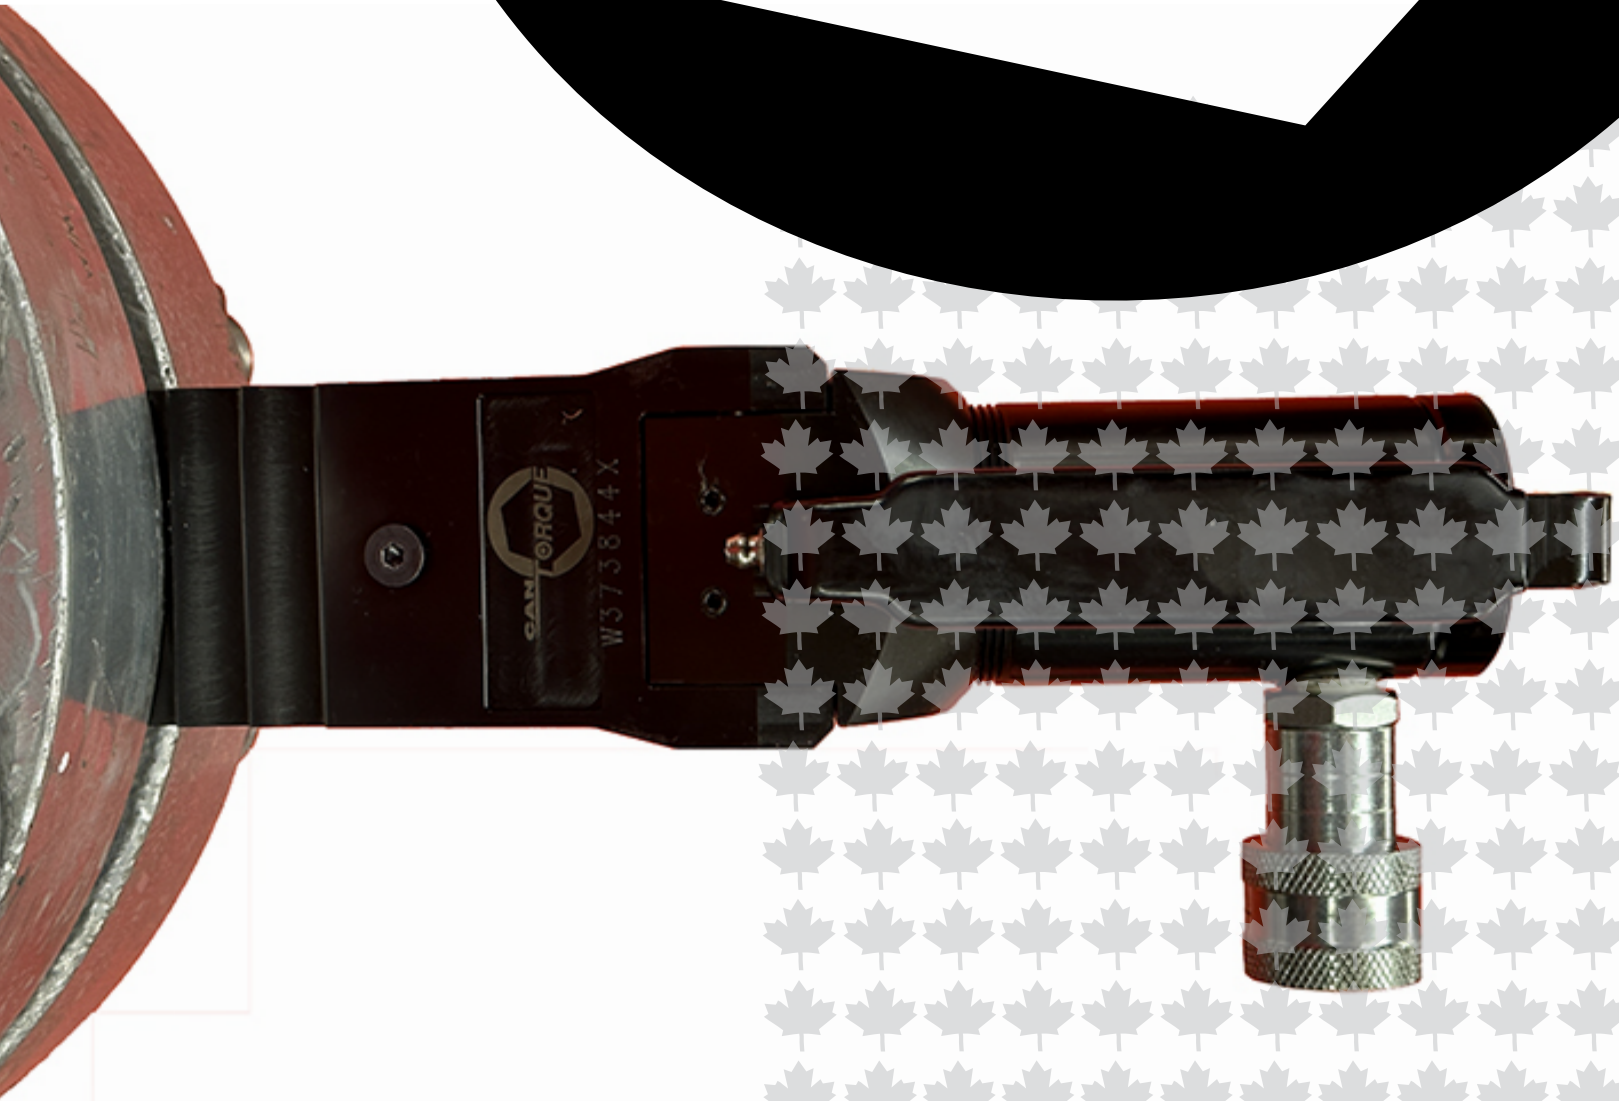

HFS15T Series

Flange Spreader Tool

Features:

- Integrated wedge concept: friction-free, smooth, parallel wedge movement eliminates flange damage and spreading arm failure.
- Unique interlocking wedge design: no first step bending and risk of slipping out of joint.
- Requires very small access gap of 6 mm (.24 in).
- Few moving parts means high durability and low maintenance.
- Operated by any hydraulic pump with rated oil pressure of 700 bar (10,000 psi).



HFS15T TECHNICAL DATA

Spreader Capacity:	Min. Spread: 33 mm
	Max. Spread: 81 mm
Max. Pressure:	700 bar
Oil Required:	79 cc
Max Output:	15.60 tons / 138.9 kN
Height:	288 mm
Weight:	7.5 kgs

KIT CONTENTS

- 1 x HFS15T Tool
- 1 x Instruction Manual
- 1 x Robust moulded carry case

Accessories:

- Safety Block
- Plastic carrying case (Case sold separately)

